


SPECIFICATION SHEET

DECORATIVE PAINT - PERLATA

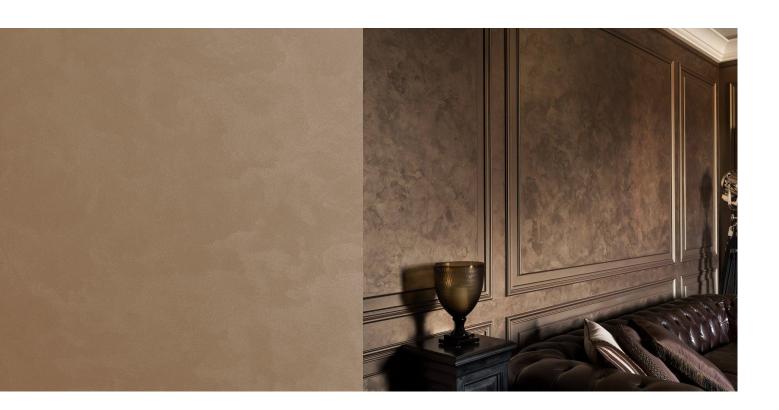

A water-based decorative wall coating, formulated with effect pigments that create an elegant finish with a subtle surface shimmer.

Exquisite and luxurious, Perlata is an elegant finish with a subtle sparkle or shimmer, creating visual texture and directional effect. With a low sheen, the intriguing surface is full of movement and tonal interest. The finish is dependent on the hand of the applicator, creating a unique and visually striking wall coating at close quarters, yet subtle when viewed from a distance.

Created from a matte basecoat and multiple pearlescent topcoat layers, Perlata is formulated to prevent mould, mildew and bacterial growth making it suitable for use in most internal environments, including bathrooms and swimming pools. It has a low VOC and is stain resistant and can be scrubbed/wiped clean.







RESISTANT



FIRE RATED





SPECIFICATIONS

DECORATIVE PAINT - PERLATA

DESCRIPTION:	Armourcoat Perlata Decorative Paint
MANUFACTURER:	Armourcoat Ltd
CONTACT DETAILS:	Address: Morewood Close, Sevenoaks, Kent, United Kingdom, TN13 2HU Telephone: +44 (0)1732 460668 Web: www.armourcoat.com Email: specsales@armourcoat.co.uk
COMPONENTS:	Water-based polymer modified paint
FIRE RATING:	ASTM E84: Flame Spread index: 5, Smoke Development Index: 0, Classification: A. BS 476 Part 6&7: Class 0
VOC CONTENT:	BREEAM International v2.0 (2016): Exemplary Level, French VOC Label: A+, French CMR Components: Pass, Italian CAM Edilizia: Pass, Belgian Regulation: Pass, ISO 11890-2: <1, Indoor Air Comfort Gold: Pass, LEED v4 + v4.1 BETA: PASS, ABG/AgBB: Pass
LOCATION:	As drawing
SYSTEM WEIGHT:	0.36-0.42 kg/m²
EMBODIED CARBON:	EN15804 +A2: 0.969Kg CO ₂ e
TECHNICAL CHARACTERISTICS, OTHER:	Mould and mildew resistance, to ASTM D3274: 10/10/10, ASTM D2486 1,075 to 1,925 cycles, ASTM D1308
COLOUR:	Insert colour selection
SEALER:	Not required OR Clearseal Gloss optional