


SPECIFICATION SHEET

POLISHED PLASTER SELECTOR RANGE - ARMURALIA

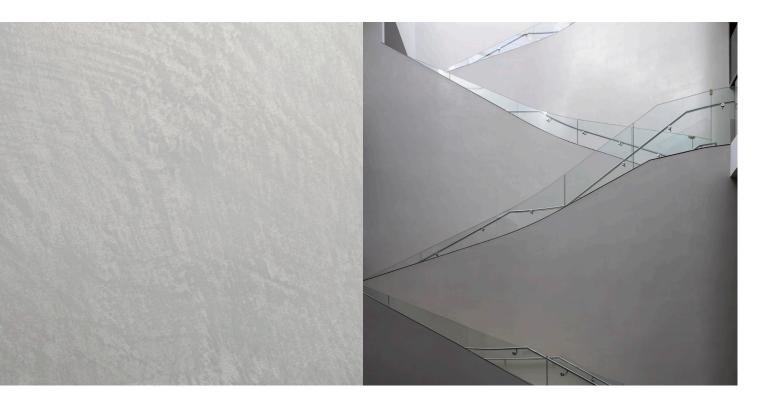

An elegant finish with a silk-like feel.

Armuralia is a superfine, mid-sheen polished plaster with subtle linear burring created by the hand of the applicator. Made from aged lime putty and crushed marble, the natural stucco material creates a sophisticated wall finish that has the feel, appearance and hardness of honed stone. Natural tonal variation is part of the inherent beauty of this finish, enhancing the feeling of depth and bringing the surface to life







FIRE



SPECIFICATIONS

POLISHED PLASTER SELECTOR RANGE - ARMURALIA

DESCRIPTION:	Armourcoat Armuralia Polished Plaster Selector Range
MANUFACTURER:	Armourcoat Ltd
CONTACT DETAILS:	Address: Morewood Close, Sevenoaks, Kent, United Kingdom, TN13 2HU Telephone: +44 (0)1732 460668 Web: www.armourcoat.com Email: specsales@armourcoat.co.uk
COMPONENTS:	Natural lime and marble
REACTION TO FIRE:	EN 13501-1:2018: A2-s1,d0
FIRE RATING:	ASTM E84: Flame Spread index: 5, Smoke Development Index: 1, Classification: A
VOC CONTENT:	BREEAM International v2.0 (2016): Exemplary, French VOC Label: A+, ASTM D2369: <1, LEED v4 + v4.1 BETA: PASS, Indoor Air Comfort: PASS, ABG/AgBB: Pass
DDEDADATORY	
PREPARATORY REINFORCING SKIMCOAT:	Armourcoat Anticrack OR not required
	As drawing
REINFORCING SKIMCOAT:	
REINFORCING SKIMCOAT: LOCATION:	As drawing
REINFORCING SKIMCOAT: LOCATION: HARDNESS: RECYCLED CONTENT	As drawing Shore D Hardness test: 67
REINFORCING SKIMCOAT: LOCATION: HARDNESS: RECYCLED CONTENT (MINIMUM):	As drawing Shore D Hardness test: 67 43%
REINFORCING SKIMCOAT: LOCATION: HARDNESS: RECYCLED CONTENT (MINIMUM): SYSTEM WEIGHT:	As drawing Shore D Hardness test: 67 43% 2.4 kg/m²
REINFORCING SKIMCOAT: LOCATION: HARDNESS: RECYCLED CONTENT (MINIMUM): SYSTEM WEIGHT: EMBODIED CARBON: TECHNICAL CHARACTERISTICS,	As drawing Shore D Hardness test: 67 43% 2.4 kg/m² EN15804 +A2: 0.979 kg CO ₂ e /m²
REINFORCING SKIMCOAT: LOCATION: HARDNESS: RECYCLED CONTENT (MINIMUM): SYSTEM WEIGHT: EMBODIED CARBON: TECHNICAL CHARACTERISTICS, OTHER:	As drawing Shore D Hardness test: 67 43% 2.4 kg/m² EN15804 +A2: 0.979 kg CO ₂ e /m² Mould and mildew resistance, to ASTM D3274: 10/10/10