


SPECIFICATION SHEET

## POLISHED PLASTER SELECTOR RANGE - SMG

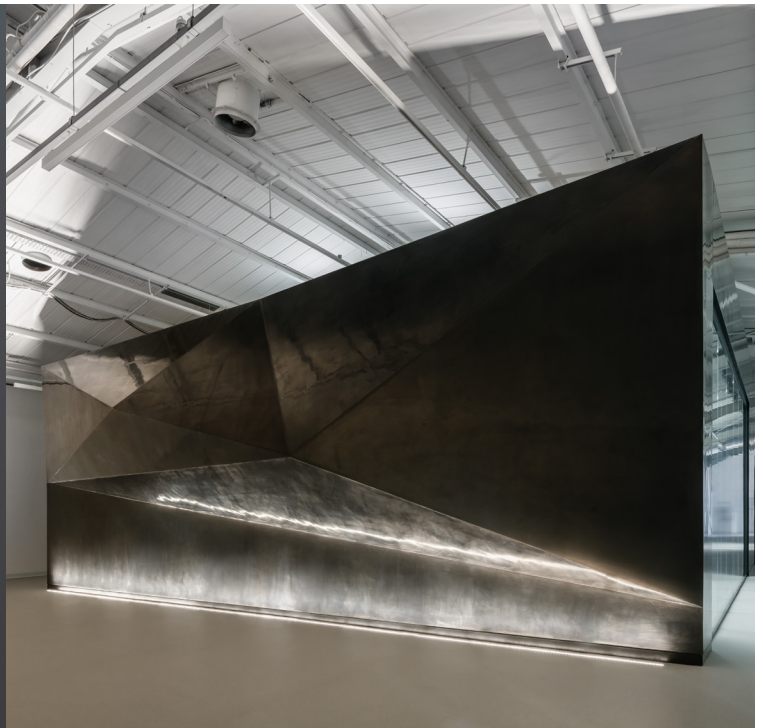

An opulent marble stucco plaster with amazing light reflection.

SMG is a highly luxurious plaster finish, offering a seamless high gloss 'lacquer' effect with virtually no surface movement. The finish works best in black, white or red to accentuate curved or angled surfaces. When using mid-tone colours the finish gains some surface movement, giving the appearance of a very lightly patterned Spatulata. SMG is equally suited to walls and ceilings where it's high reflectivity adds another dimension to interior spaces.



SUSTAINABLE  
ACCREDITATIONS



NATURAL  
MATERIAL



FIRE RATED



## SPECIFICATIONS

# POLISHED PLASTER SELECTOR RANGE - SMG

|  |  |
|--|--|
| <b>DESCRIPTION:</b>                      | Armourcoat SMG Polished Plaster Selector Range   |
| <b>MANUFACTURER:</b>                     | Armourcoat Ltd   |
| <b>CONTACT DETAILS:</b>                  | <p><b>Address:</b> Morewood Close, Sevenoaks, Kent, United Kingdom, TN13 2HU</p> <p><b>Telephone:</b> +44 (0)1732 460668</p> <p><b>Web:</b> <a href="http://www.armourcoat.com">www.armourcoat.com</a></p> <p><b>Email:</b> <a href="mailto:specsales@armourcoat.co.uk">specsales@armourcoat.co.uk</a></p> |
| <b>COMPONENTS:</b>                       | Natural lime and marble  |
| <b>VOC CONTENT:</b>                      | BREEAM International v2.0 (2016): Exemplary Level, French VOC Label: A+, Indoor Air Comfort: Pass, Indoor Air Comfort Gold: Pass, ABG/AgBB: Pass, Belgian Regulation: Pass, ASTM D2369: <1, SCAQMD Rule 1113: Pass, LEED v4 + v4.1 BETA: Pass  |
| <b>PREPARATORY REINFORCING SKIMCOAT:</b> | Armourcoat Anticrack OR not required   |
| <b>LOCATION:</b>                         | As drawing   |
| <b>RECYCLED CONTENT (MINIMUM):</b>       | 23%  |
| <b>SYSTEM WEIGHT:</b>                    | 2.1 kg/m <sup>2</sup>  |
| <b>EMBODIED CARBON:</b>                  | EN15804 +A2: 0.9 kg CO <sub>2</sub> e/m <sup>2</sup>   |
| <b>TECHNICAL CHARACTERISTICS, OTHER:</b> | Mould and mildew resistance, to ASTM D3274: 10/10/10   |
| <b>COLOUR:</b>                           | Insert colour selection  |
| <b>SEALER:</b>                           | Eco Wax as standard  |