


ARMOURCOAT®

SUSTAINABLE LUXURY FINISHES

SPECIFICATION SHEET

SCULPTURAL PLASTER - FLOW XL

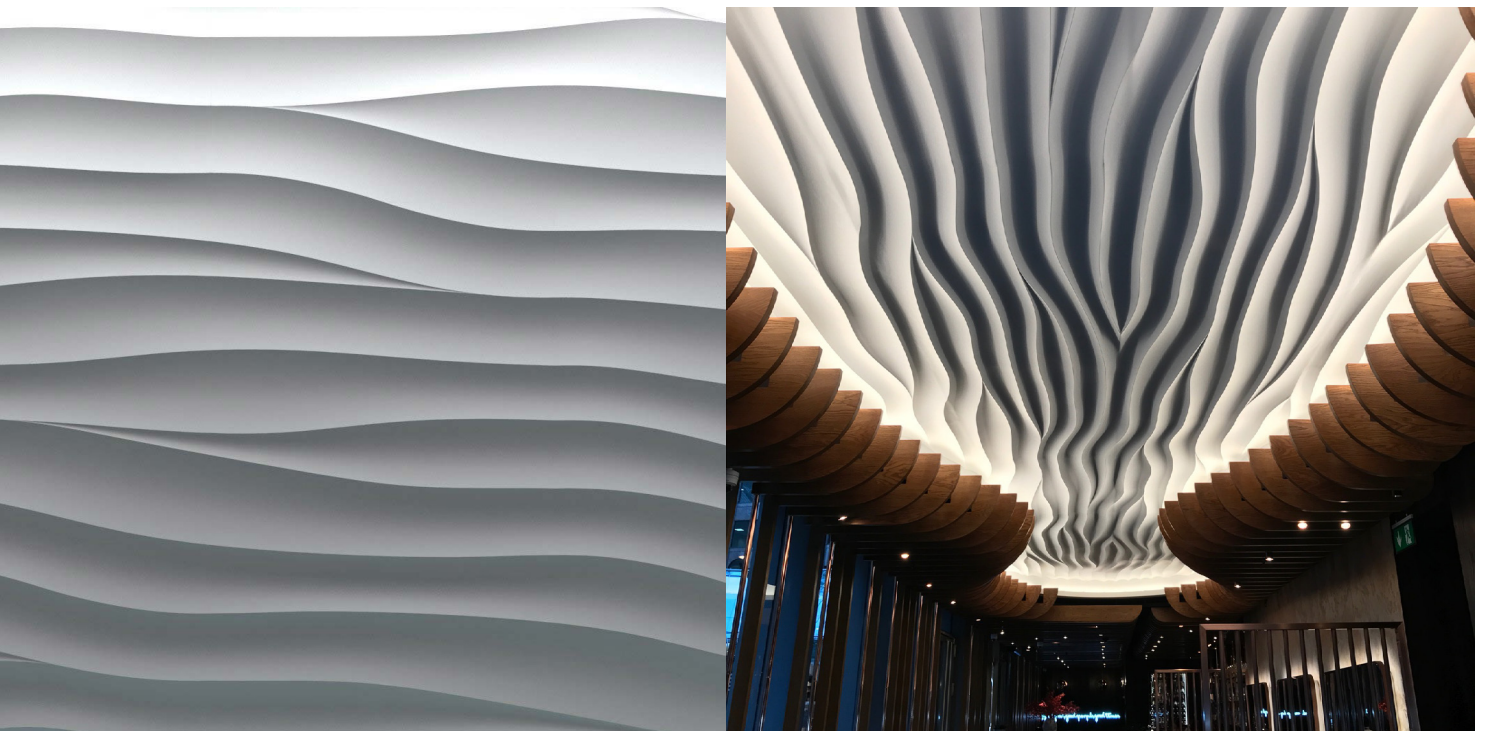

An impactful design for large spaces.

Flow XL is a deeply sculpted, organic design with bold flowing movement. The hand sculpted surfaces create dramatic shadows as they move confidently across the wall. The recommended finish for Flow XL is Spatulata, a highly polished, superfine marble stucco polished plaster with amazing lustre.

Armourcoat Sculptural designs are handmade and seamlessly installed by skilled applicators before being decorated in the surface finish of your choice. Suitable for projects of all types, including swimming pools, sculptural designs are extremely durable and VOC free.



SEAMLESS
3D SURFACE



SUSTAINABLE
ACCREDITATIONS



FIRE RATED





SPECIFICATIONS

SCULPTURAL PLASTER - FLOW XL

DESCRIPTION:	Armourcoat Sculptural Plaster - Flow XL
MANUFACTURER:	Armourcoat Ltd
CONTACT DETAILS:	Address: Morewood Close, Sevenoaks, Kent, United Kingdom, TN13 2HU Telephone: +44 (0)1732 460668 Web: www.armourcoat.com Email: specsales@armourcoat.co.uk
COMPONENTS:	Glass Reinforced Gypsum (GRG)
FIRE RATING:	EN 13501-1:2018: A1/A1 _{fl}
VOC CONTENT:	BREEAM International v2.0 (2016): Exemplary Level, BREEAM NOR v6 (2022): Exemplary Level, LEED v4 Beta (Feb 2021): Pass, French VOC Label: A+, French CMR Components: Pass, Italian CAM Edilizia: Pass, Indoor Air Comfort Gold: Pass, ABG/AgBB: Pass, Belgian Regulation: Pass
LOCATION:	As drawing
RECYCLED CONTENT (MINIMUM):	17%
DESIGN:	Flow XL
FINISHES:	Matt emulsion paint OR Perlata OR Spatulata OR Armuralia
COLOUR:	Insert selection from finish colour palette
SEALER:	Defined by selected finish
SYSTEM WEIGHT:	17.0 kg/m ²
THICKNESS:	42mm
EMBODIED CARBON:	EN15804 +A2: 0.082 Kg CO ₂ e
TECHNICAL CHARACTERISTICS, OTHER:	Mould and mildew resistance, ASTM C109M: =>33Mpa, ASTM C-348: =>10Mpa