


ARMOURCOAT®

SUSTAINABLE LUXURY FINISHES

SPECIFICATION SHEET

SCULPTURAL PLASTER - SCRIPT

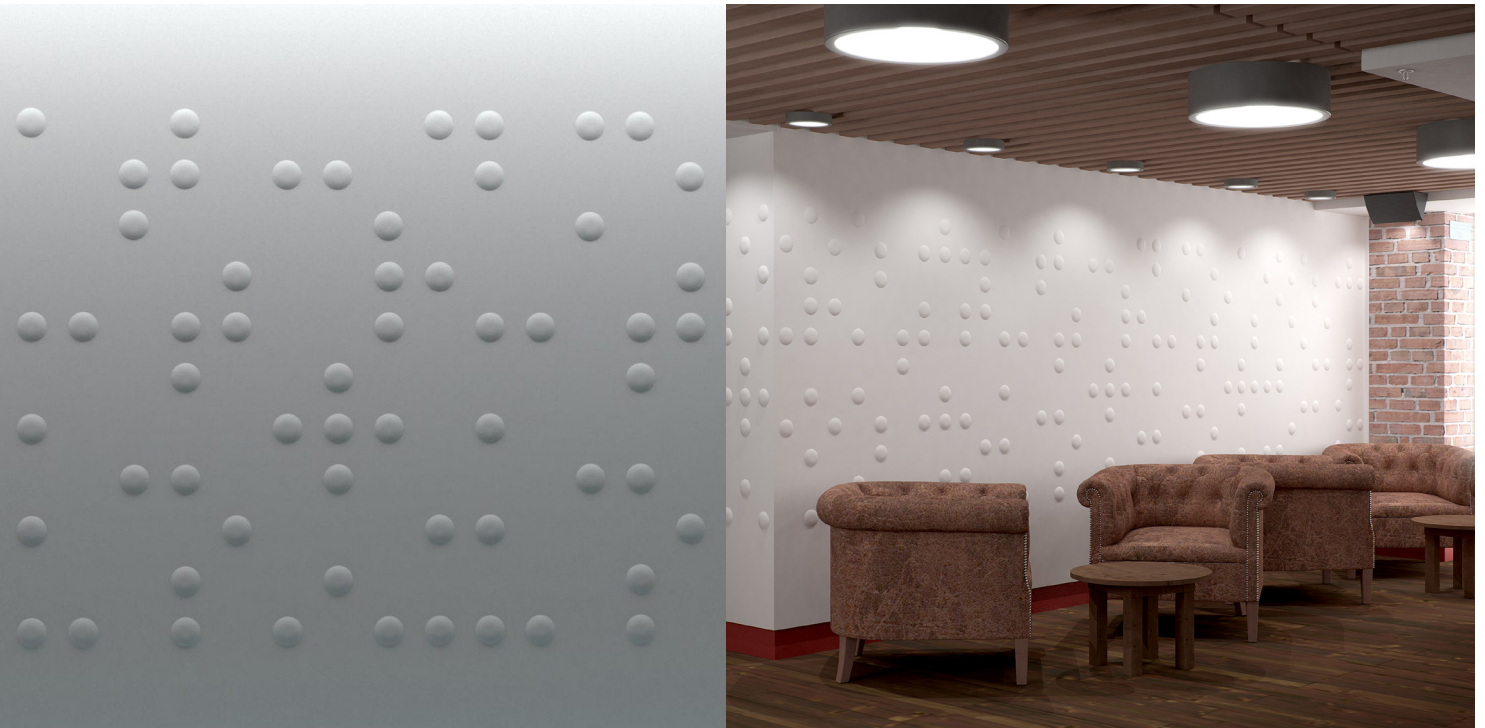

An engaging three dimensional surface of protruding dots that echoes the tactility of Braille.

Script takes inspiration from the beauty of simple patterns, creating one-off walls with a unique aesthetic. The impact of the design can be controlled with lighting, creating anything from subtle to stark shadowing. The recommended finish for Script is Perlata, a pearlescent decorative paint with a subtle shimmer and high durability.

Armourcoat Sculptural designs are handmade and seamlessly installed by skilled applicators before being decorated in the surface finish of your choice. Suitable for projects of all types, including swimming pools, sculptural designs are extremely durable and VOC free.



SEAMLESS
3D SURFACE



SUSTAINABLE
ACCREDITATIONS



FIRE RATED



SPECIFICATIONS

SCULPTURAL PLASTER - SCRIPT

DESCRIPTION:	Armourcoat Sculptural Plaster - Script
MANUFACTURER:	Armourcoat Ltd
CONTACT DETAILS:	<p>Address: Morewood Close, Sevenoaks, Kent, United Kingdom, TN13 2HU</p> <p>Telephone: +44 (0)1732 460668</p> <p>Web: www.armourcoat.com</p> <p>Email: specsales@armourcoat.co.uk</p>
COMPONENTS:	Glass Reinforced Gypsum (GRG)
FIRE RATING:	EN 13501-1:2018: A1/A1 _{fl}
VOC CONTENT:	BREEAM International v2.0 (2016): Exemplary Level, BREEAM NOR v6 (2022): Exemplary Level, LEED v4 Beta (Feb 2021): Pass, French VOC Label: A+, French CMR Components: Pass, Italian CAM Edilizia: Pass, Indoor Air Comfort Gold: Pass, ABG/AgBB: Pass, Belgian Regulation: Pass
LOCATION:	As drawing
RECYCLED CONTENT (MINIMUM):	17%
DESIGN:	Script
FINISHES:	Matt emulsion paint OR Perlata
COLOUR:	Insert selection from finish colour palette
SEALER:	Defined by selected finish
SYSTEM WEIGHT:	20.0 kg/m ²
THICKNESS:	20mm
EMBODIED CARBON:	EN15804 +A2: 0.082 Kg CO ₂ e
TECHNICAL CHARACTERISTICS, OTHER:	Mould and mildew resistance, ASTM C109M: =>33Mpa, ASTM C-348: =>10Mpa